


BV25066 | PN40 EN 1092-2

Edelstahl (1.4408)

Min. Temperatur -60°C (bis -200°C möglich)

Max. Temperatur +400°C

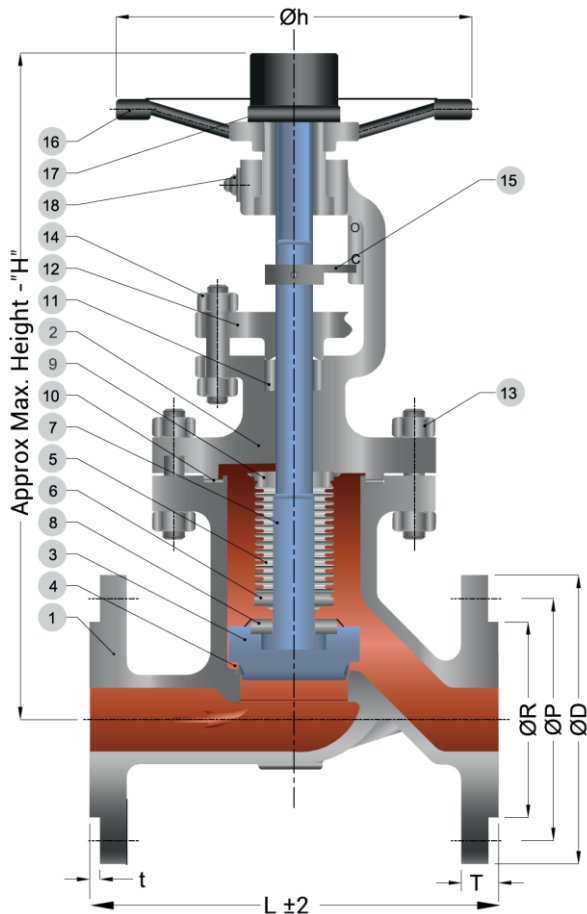

Nr.	Komponente	Material
1,2	Gehäuse & Deckel	1.4408/ ASTM - A 351 Gr.CF8M
3	Kegel	1.4408/ ASTM - A 351 Gr.CF8M + Stellite Gr.6
3	Sitz	1.4408/ ASTM - A 351 Gr.CF8M + Stellite Gr.6
4	Faltenbalg	1.4571 / AISI - 316Ti
5	Faltenbalg Bund	1.4401 / ASTM - A 276 TYPE 316
6,7	Spindel, Manschettenring	1.4401 / ASTM - A 276 TYPE 316
9	Deckelmanschette	1.4401 / ASTM - A 276 TYPE 316
10	Deckeldichtung	SPW - SS 316 + Grafit
11	Packung	Reingrafit
12	Stopfbuchse	1.4408/ ASTM - A 351 Gr.CF8M
13	Deckelschrauben	ASTM - A193 Gr.B8M / A194 Gr.8M
14	Schrauben & Muttern	ASTM - A193 Gr.B8M / A194 Gr.8M
15	Stellungsanzeige	1.4408 / ASTM - A 351 Gr.CF8M
16	Handrad	Sphäroguss
17	Handrad Kappe	1.4401 / AISI - 316
18	Schmiernippel	1.4401 / AISI - 316

NULL LEKAGE

DIN: Stufe A nach EN12266-1

Flansch zu Flansch Dimension nach EN558-1

Flansche nach EN1092-2 Form B

DN	PN	ØD	ØP	ØR	T	t	Nr.-Löcher / Ø	L (Flansch zu Flansch)	Øh	Hub	H (geschl.)	Gewicht (kg)
15	40	95	65	45	16	2	4/Ø14	130	172	4	264	8,5
20	40	105	75	58	18	2	4/Ø14	150	172	5	270	9,5
25	40	115	85	68	18	2	4/Ø14	160	172	7	300	11,5
32	40	140	100	78	18	2	4/Ø18	180	172	8	305	17,0
40	40	150	110	88	18	3	4/Ø18	200	200	10	330	19,0
50	40	165	125	102	20	3	4/Ø18	230	200	13	360	21,5
65	40	185	145	122	22	3	4/Ø18	290	250	16	430	33,5
80	40	200	160	138	24	3	8/Ø18	310	300	19	460	45,0
100	40	235	190	162	24	3	8/Ø22	350	300	25	550	61,5
125	40	270	220	188	26	3	8/Ø26	400	350	32	615	102,0
150	40	300	250	218	28	3	8/Ø26	480	400	38	690	122,0
200	40	375	320	285	34	3	12/Ø30	600	450	50	820	222,0
250	40	450	385	345	38	3	12/Ø33	730	500	70	1'010	362,0
300	40	515	450	410	42	4	12/Ø33	850	600	80	1'230	533,0

alle Masse in mm

Betriebsbedingungen							
Temperatur °C	-60/150	150	200	250	300	350	400
Druck bar	40	36,3	33,7	31,8	29,7	28,5	27,4